

2330828


hot street - dirt track

Ford YBB Cosworth 4WD

I-4cyl 2.0L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 266°	263°
duration @ 1.0mm	: 231°	230°
valve lift	: 10.50mm	9.45mm
cam lift	:	
lobe angle	: 112°	112°
timing @ 1.0mm	: 3° / 48°	47° / 3°
valve lift @ TDC	: 1.30mm	1.30mm
parts setup:		
cam wheels :	: CSK5119	: CSK5119
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99366	: 99366
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009
fitted load / length	: 35kg @ 33.0mm	: 35kg @ 33.0mm
max. load / lift	: 97kg @ 12.5mm	: 97kg @ 12.5mm

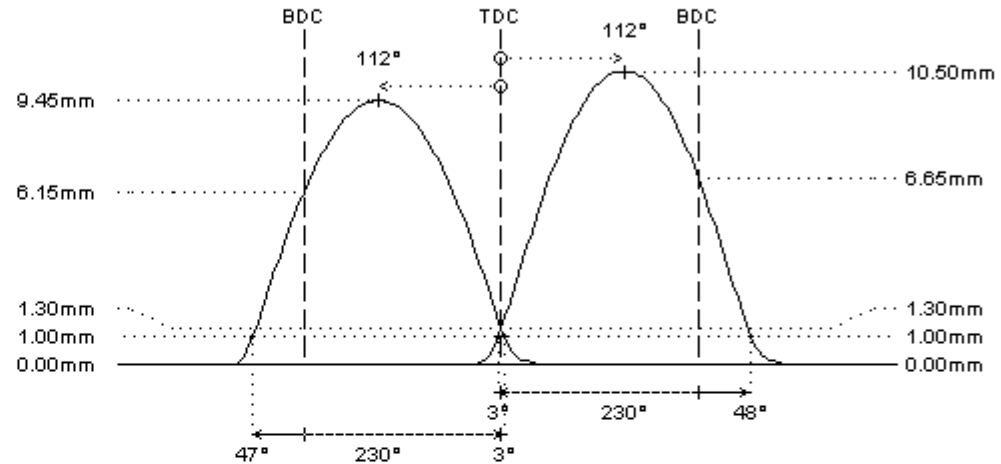

REMARKS :

- # camshafts for turbo engines
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors

REMARKS :